



## PUP\_EN24C\_T1R4

PUP\_EN24C\_T1R4 (Figure 1) is a MIMO radar development platform. It works at K-band with one transmitting channel and four receiving channels.

By using proper antennas, the platform can be configured as (4In 1Out) MIMO radar. The best working frequency for this platform is 24GHz-25GHz and can be extended to 24GHz-26GHz with slight performance degradation.



Figure 1. PUP\_EN24C\_T1R4

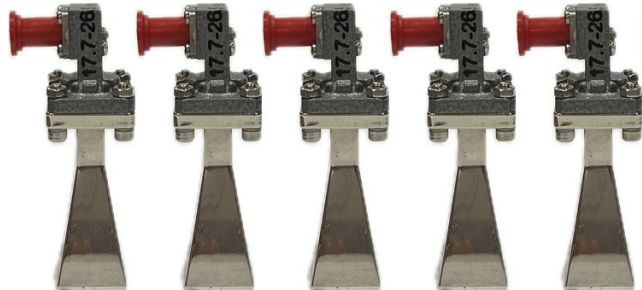


Figure 2. PUP\_ATN24C\_HN\_10/\_15

The RF front-end frequency sweep is implemented with a phase-locked loop (PLL) to achieve linearity of frequency modulations. The FPGA-based controller connects the front end with an eight-channel LVDS (low-voltage differential signaling) 50Msps pipeline ADC module and connects the user's computer with a high-speed (up to 480Mb/s) USB interface.

This device requires a licensed installation of MATLAB, which must be provided by the user. The platform includes user-friendly MATLAB GUI (Graphical User Interface) source code. The GUI serves not only as an operating interface but also as a reference implementation demonstrating the system workflow, data formats, and signal processing methods. The provided source code can be readily adapted and integrated into your own projects, helping to accelerate development.

The platform works between 24GHz and 25GHz and is expandable to 24GHz-26GHz. The detectable range is approximately 15 meters for people and 40 meters for medium-sized vehicles.

Raw data can be recorded for post-processing.

Luswave Technology LLC

**Sales:** +1-703-338-8380 **Technical:** +1-571-296-6435 **Fax:** +1-571-223-5483 **Email:** service@luswave.com

## SPECIFICATIONS

Specification	Minimum	Typical	Maximum
Channels		1x Transmitters, 4x Receivers	
Antennas		5x External Antennas	
Modulations		FMCW, CW	
Typical Frequency Range	24GHz		25GHz
Expandable Frequency Range	24GHz		26GHz
Sweep Time		0.5ms, 1ms, 2ms, 4ms, 8ms	
Sample Per Sweep		128,256,512,1024,2048,4096	
Tuning Voltage	0		4V
Tuning Sensitivity		0.8GHz/v	
Transmitting Power (24-25GHz)	19dBm	20dBm	21dBm
SSB Phase Noise @1MHz offset		-99dBc	
Noise Figure		10dB	
Maximum Input power		5dBm	
IIP_1dB		-12dBm	
Supply Voltage	5.75V	6V	6.25V
Supply Current		1200mA	
Operation Temperature	-40 °C		85 °C
Dimensions		L:160mm, W:125mm, H:32mm	
Weight		20oz	

Luswave Technology LLC

**Sales:** +1-703-338-8380 **Technical:** +1-571-296-6435 **Fax:** +1-571-223-5483 **Email:** service@luswave.com