



## PUP\_EN5C\_T1R2

PUP\_EN5C\_T1R2 (Figure 1) is a C Band radar development platform with one transmitting and two receiving channels.

PUP\_EN5C\_T1R2, with removable mounting brackets, is sold with three small sized patch antennas (Figure 2). Users can purchase third-party standard gain horn antennas for better performance.



Figure 1. PUP\_EN5C\_T1R2

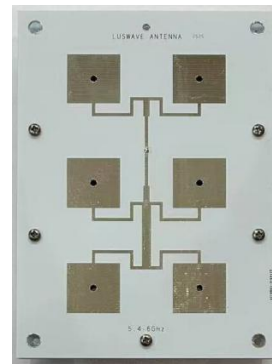


Figure 2. C Band Patch Antenna

Besides range, velocity, and DOA measurements, PUP\_EN5C\_T1R2 can be configured as interferometric radar using longer RF cables (0.5-1m) for vibration estimation and detection.

The RF front-end frequency sweep is implemented with a phase-locked loop (PLL) to achieve linearity of frequency modulations. The FPGA-based controller connects the front end with a four-channel LVDS (low-voltage differential signaling) 50MSPS pipeline ADC module and connects the user's computer with a high-speed (up to 480Mb/s) USB interface.

This device requires a licensed installation of MATLAB, which must be provided by the user. The platform includes user-friendly MATLAB GUI (Graphical User Interface) source code. The GUI serves not only as an operating interface but also as a reference implementation demonstrating the system workflow, data formats, and signal processing methods. The provided source code can be readily adapted and integrated into your own projects, helping to accelerate development.

This platform works between 5.6GHz and 6GHz and is expandable to 5.4GHz-6GHz. The detectable range is approximately 30 meters for people and 80 meters for medium-sized vehicles.

Raw data can be recorded for post-processing.

Luswave Technology LLC

**Sales:** +1-703-338-8380 **Technical:** +1-571-296-6435 **Fax:** +1-571-223-5483 **Email:** service@luswave.com

## SPECIFICATIONS

Specification	Minimum	Typical	Maximum
Channels		1x Transmitters, 2x Receivers	
Antennas		3x External Antennas	
Modulations		FMCW, CW	
Typical Frequency Range	5.6GHz		6GHz
Expandable Frequency Range	5.4GHz		6GHz
Sweep Time		0.5ms, 1ms, 2ms, 4ms, 8ms	
Sample Per Sweep		128,256,512,1024,2048,4096	
Tuning Voltage	0		5V
Tuning Sensitivity		140MHz/V	
Transmitting Power (24-25GHz)	21dBm	22dBm	23dBm
SSB Phase Noise @1MHz offset		-130dBc	
Noise Figure		1.8dB	
Maximum Input power		10dBm	
IIP <sub>1dB</sub>		-4dBm	
Supply Voltage	5.75V	6V	6.25V
Supply Current		1500mA	
Operation Temperature	-40°C		85°C
Dimensions		L:160mm, W:125mm, H:32mm	
Weight		20oz	

Luswave Technology LLC

**Sales:** +1-703-338-8380 **Technical:** +1-571-296-6435 **Fax:** +1-571-223-5483 **Email:** service@luswave.com